

Expert in Battery Energy Storage Solution









Social Accountability

Management System Certification



Management System Certification



Innovation and Intellectual

Property Management (Level 1)





280Ah LFP Cell Product

Carbon Footprint Certification

HiTHIUM produce energy storage batteries with superior safety, high efficiency, long cycle life and minimized cost. Our game-changing innovations contribute to technologically advanced solutions that benefit business and society.

Four Research Institutes



Battery Research Institute

Leading battery chemistry development



Control Technology Research Institute

Control technology strategy implementation



Institute of Advanced Technology


Industrialization of advanced materials




Engineering Center

Focus on advanced manufacturing capabilities

Intellectual Property Portfolio

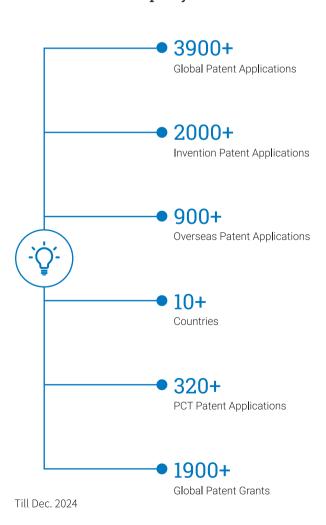

Intelligent Manufacturing

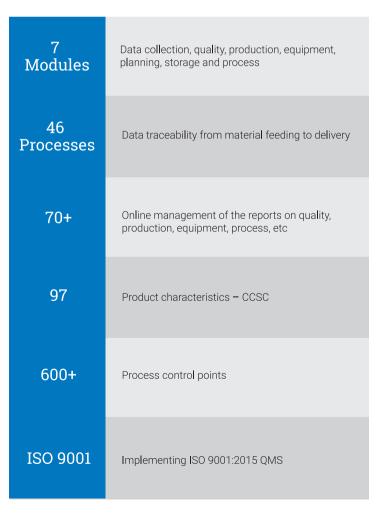

C&I All-in-One Energy Storage System





| Product | HCL 125kW-261kWh-400 | HCL-DC 418kWh-0.5P | |
|------------------------------|----------------------|---------------------|--|
| Series-para llel Mode | 1P260S (314Ah Cell) | 1P416S (314Ah Cell) | |
| No. of Battery Modules | 5 | 8 | |
| Rated charge/discharge | 0.5 P / 0.5 P | 0.5 P / 0.5 P | |
| Rated DC Voltage | 832 V | 1331.2 V | |
| Rated Energy | 261 kWh | 417.99 kWh | |
| Dimension (L*W*H) | 1000*1350*2380 (mm) | 1300*1350*2380 (mm) | |
| Weight | ≤2.7t | ≤3.7t | |
| Protection Level | IP55 | IP55 | |
| PCS | 125 kW (Adjustable) | / | |
| Rated AC Voltage | 400 Vac, 3W+N+PE | / | |

HeroEE Residential Energy Solution









| Product | HeroEE LIGHT (HeroEE 1 Plus) | HeroEE 2 | HeroEE MaxPower |
|-------------------|------------------------------|------------------|------------------|
| Rated Power | 500 W | 1000 W | 5000W |
| Rated Capacity | 1004.8 Wh | 2009.6 Wh | 8038.4Wh |
| AC Input Voltage | 200-240 [VAC] | 200-240 [VAC] | 90-280 [VAC] |
| PV Input Voltage | 12-50 [VDC] | 12-50 [VDC] | 60-450 [VDC] |
| Battery Cycles | 11000 cls | 11000 cls | 11000 cls |
| Dimension (L*W*H) | 235*142*315 (mm) | 360*285*430 (mm) | 500*230*758 (mm) |
| Weight | 9.3 kg | 18.3 kg | 58 Kg |

| Product | HeroEE 16 Battery |
|---------------------------------------|----------------------|
| Battery Capacity | 16000 Wh |
| Rated Voltage | 51.2 [VDC] |
| Charging/Discharging Voltage Range | 43.2-56.8 [VDC] |
| Maximum charge/ discharge current | 200A/200A |
| Battery Cycles | 11000 cls |
| Dimension (L*W*H) | 540.6*240*781.2 (mm) |
| Weight | 110 kg |

Energy Storage Battery Cell





| Battery cell | COCell 1175Ah | CCell 587Ah | |
|-------------------------|-----------------------|-----------------------|--|
| Operating Voltage | 2.5 V - 3.65 V | 2.5 V - 3.65 V | |
| Charge & Discharge Rate | 0.25 P / 0.25 P | 0.5P / 0.5P | |
| Energy Density | ≥ 180 Wh/kg | ≥ 185 Wh/kg | |
| Operating Temperature | -30 °C ~ 60 °C | -30 °C ~ 60 °C | |
| Dimension (L*W*H) | 580.2*75.2*216.3 (mm) | 286.0*73.5*216.3 (mm) | |
| Cycle Life | 11000 cls | 11000 cls | |





| Battery cell | 280Ah-1P | 314Ah |
|-------------------------|-----------------------|-----------------------|
| Operating Voltage | 2.5 V - 3.65 V | 2.5 V -3.65 V |
| Charge & Discharge Rate | 1P/1P | 0.5 P / 0.5 P |
| Energy Density | ≥ 159.2 Wh/kg | ≥ 173.2 Wh/kg |
| Operating Temperature | -30 °C ~ 60 °C | -30 °C ~ 60 °C |
| Dimension (L*W*H) | 174.7*71.6*207.1 (mm) | 174.7*71.7*207.1 (mm) |
| Cycle Life | 7000 cls | 11000 cls |

Battery cell

COCell N162Ah



| Operating Voltage | 1.5 V - 3.3 V | Operating Temperature | -40 °C ~ 60 °C | |
|-------------------------|---------------|-----------------------|-----------------------|--|
| Charge & Discharge Rate | 1P/1P | Dimension (L*W*H) | 174.7*71.7*207.1 (mm) | |
| Energy Density | ≥ 95.2 Wh/kg | Cycle Life | 20000 cls | |

Energy Battery Module





| Battery Module | 104kWh | COPack 195kWh 2h ∣ 4h |
|-----------------------|-------------------|---------------------------------|
| Series-parallel Mode | 2P52S | 1P104S 1P52S |
| Charge/Discharge Rate | 0.5 P / 0.5 P | 0.5 P / 0.5 P 0.25 P / 0.25 P |
| Rated Voltage | 166.4 V | 332.8 V 166.4 V |
| Rated Energy | 104 kWh | 195 kWh |
| IP Degree | IP67 | IP67 |
| Dimension (W*D*H) | 800*2184*243 (mm) | 1248*2230*255 (mm) |
| Weight | 667 kg | 1190 kg 1162 kg |



| Battery Module | 2.56kWh | 5.12kWh |
|-----------------------|------------------|------------------|
| Series-parallel Mode | 1P16S | 1P32S |
| Charge/Discharge Rate | 0.5 C / 0.5 C | 0.5 C / 0.5 C |
| Rated Voltage | 51.2 V | 102.4 V |
| Rated Energy | 2.56 kWh | 5.12 kWh |
| Dimension (L*W*H) | 575*158*180 (mm) | 591*308*175 (mm) |
| Weight | ≤ 20 kg | ≤ 35 kg |

Liquid-Cooled Energy Storage System





| Energy Storage System | 5.016MWh | ⇔Power 6.25MWh 2h 4h | |
|--------------------------|---------------------|-----------------------------|--|
| Series-parallel Mode | 6*2P416S | 8P416S 4P416S | |
| Charge/Discharge Rate | 0.5P / 0.5P | 0.5P / 0.5P 0.25P / 0.25P | |
| Rated Voltage | 1331.2 V | 1331.2 V | |
| Rated Energy | 5.016 MWh | 6.25 MWh | |
| IP Degree | IP55 | IP55 | |
| Dimension (L*W*H) | 6058*2438*2896 (mm) | 6058*2438*2896 (mm) | |
| Weight | ≤ 40 t | ≤ 48 t | |



Global Leader in **All-round Energy Storage Solutions**

Founded in 2019, HiTHIUM is a leading global company in new energy technology, committed to delivering all-round energy storage solutions centered on advanced energy storage battery and system technologies. HiTHIUM has cultivated robust research, production, sales, and service capabilities in global markets.

As the only pure-play energy storage company to achieve GWh-scale global shipments of lithium-ion ESS batteries, HiTHIUM's customer-centric focus drives technological and innovative products and solutions for customers across more than 20 countries and regions.







Xiamen HiTHIUM Energy Storage Technology Co., Ltd.

Address: HiTHIUM Industrial Park, Tongxiang High - Tech Zone, Xiamen, Fujian, China

Email: hithium@hithium.com Website: https://hithium.com

HiTHIUM Energy Storage Technology USA Inc.

Address: 4046 Clipper Ct, Fremont, CA 94538, United States

Email: FremontOffice@hithium.com

HiTHIUM Energy Storage Technology Deutschland GmbH

Address: Landsberger Str. 155, 80687 Munich, Germany

Email: enquiries@hithium.com

Version: 202511V1.0



The product data here are for reference only